




E-DAT C6 24 port 1RU modular LSA patch panel

- 19" 1RU frame made of silver anodized aluminum with 24 individually shielded RJ45 jacks
- certified to GHMT Cat.6 12C-de-embedded
- compliance with class E_A to ISO/IEC 11801 Ed.2.2:2011-06, DIN EN 50173-1:2011-09
- tested: Link up to 500 MHz
- for 10 GBit Ethernet (IEEE 802.3an)
- suitable for Power over Ethernet (PoE, PoE plus and UPoE)
- 4 module housings, made of zinc die-casting, with six RJ45 jacks each
- wire pairs can be led to the LSA terminal without untwisting the pair
- connection of 2 to 4-pair data lines to LSA insulation displacement connectors (AWG 22-24) conductor colors marking to TIA/EIA 568A
- label window for enclosed identification labels
- optional strain relief using cable ties
- modules connected by means of grounding rail, incl. 30 cm grounding cable

Dimensional drawing

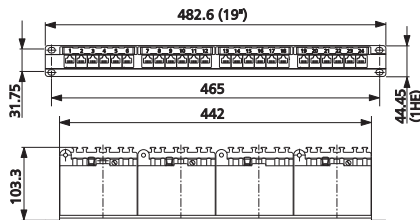


P/N	Color	Feature 1	Feature 2	EAN
130856-E	anodized alu.	24 port		4250184111740



E-DAT C6 24 port 1RU LSA patch panel

- 19" 1RU frame made of silver anodized aluminum with 24 individually shielded RJ45 jacks
- certified to GHMT Cat.6 12C-de-embedded
- compliance with class E_A to ISO/IEC 11801 Ed.2.2:2011-06, DIN EN 50173-1:2011-09
- tested: Link up to 500 MHz
- for 10 GBit Ethernet (IEEE 802.3an)
- suitable for Power over Ethernet (PoE, PoE plus and UPoE)
- wire pairs can be led to the LSA terminal without untwisting the pair
- connection of 2 to 4-pair data lines to LSA insulation displacement connectors (AWG 22-24) conductor colors marking to TIA/EIA 568A
- optional strain relief using cable ties
- modules connected by means of grounding rail,

Dimensional drawing

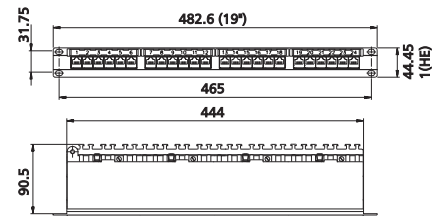

P/N	Color	Feature 1	Feature 2	EAN
130855-E	anodized alu.	24 port		4250184104124